



DOMUS

YOUR SOLID GUARANTEE OF QUALITY

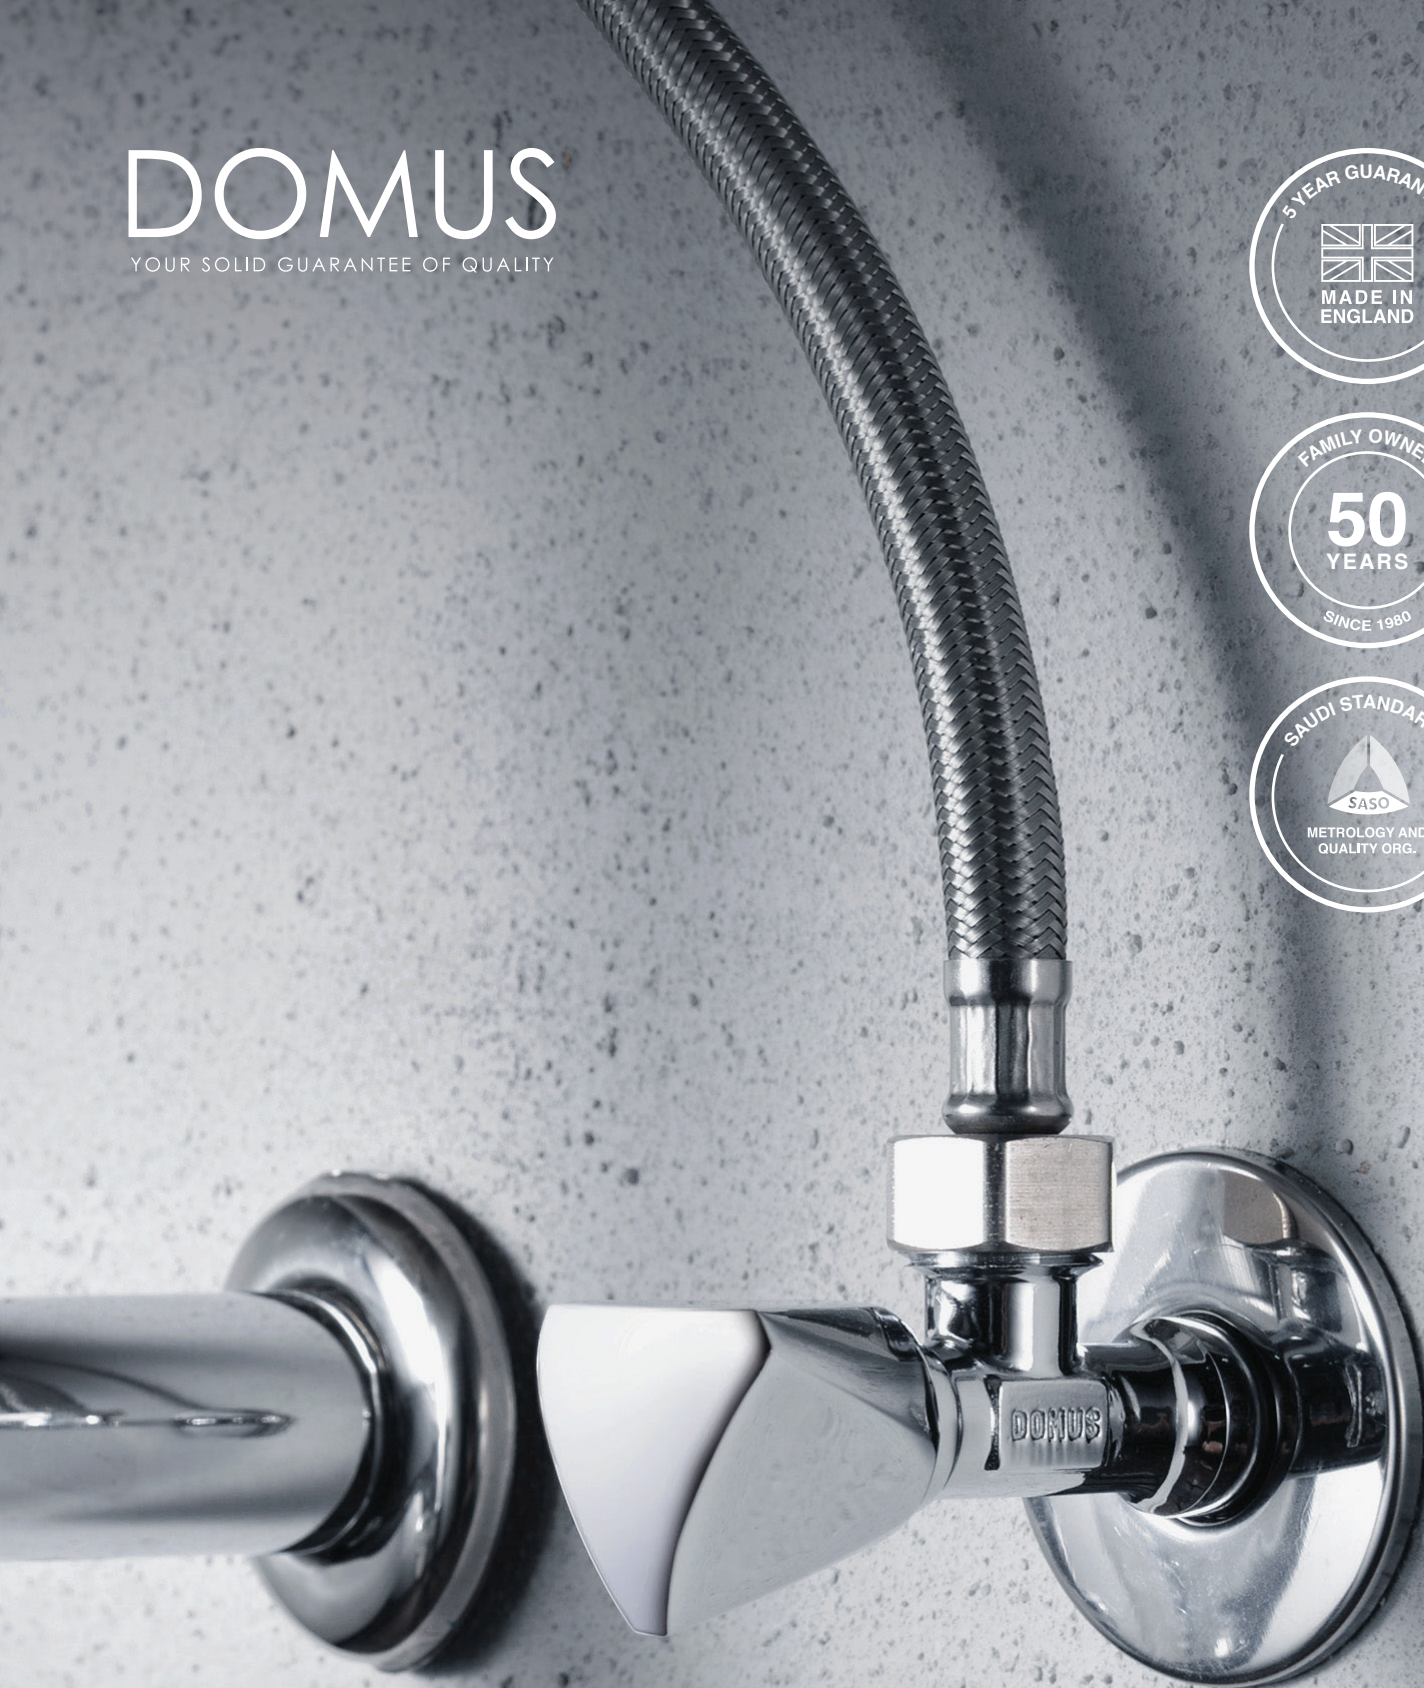

PLUMBING
PRODUCT CATALOGUE
2026

DOMUS-ENGLAND.CO.UK

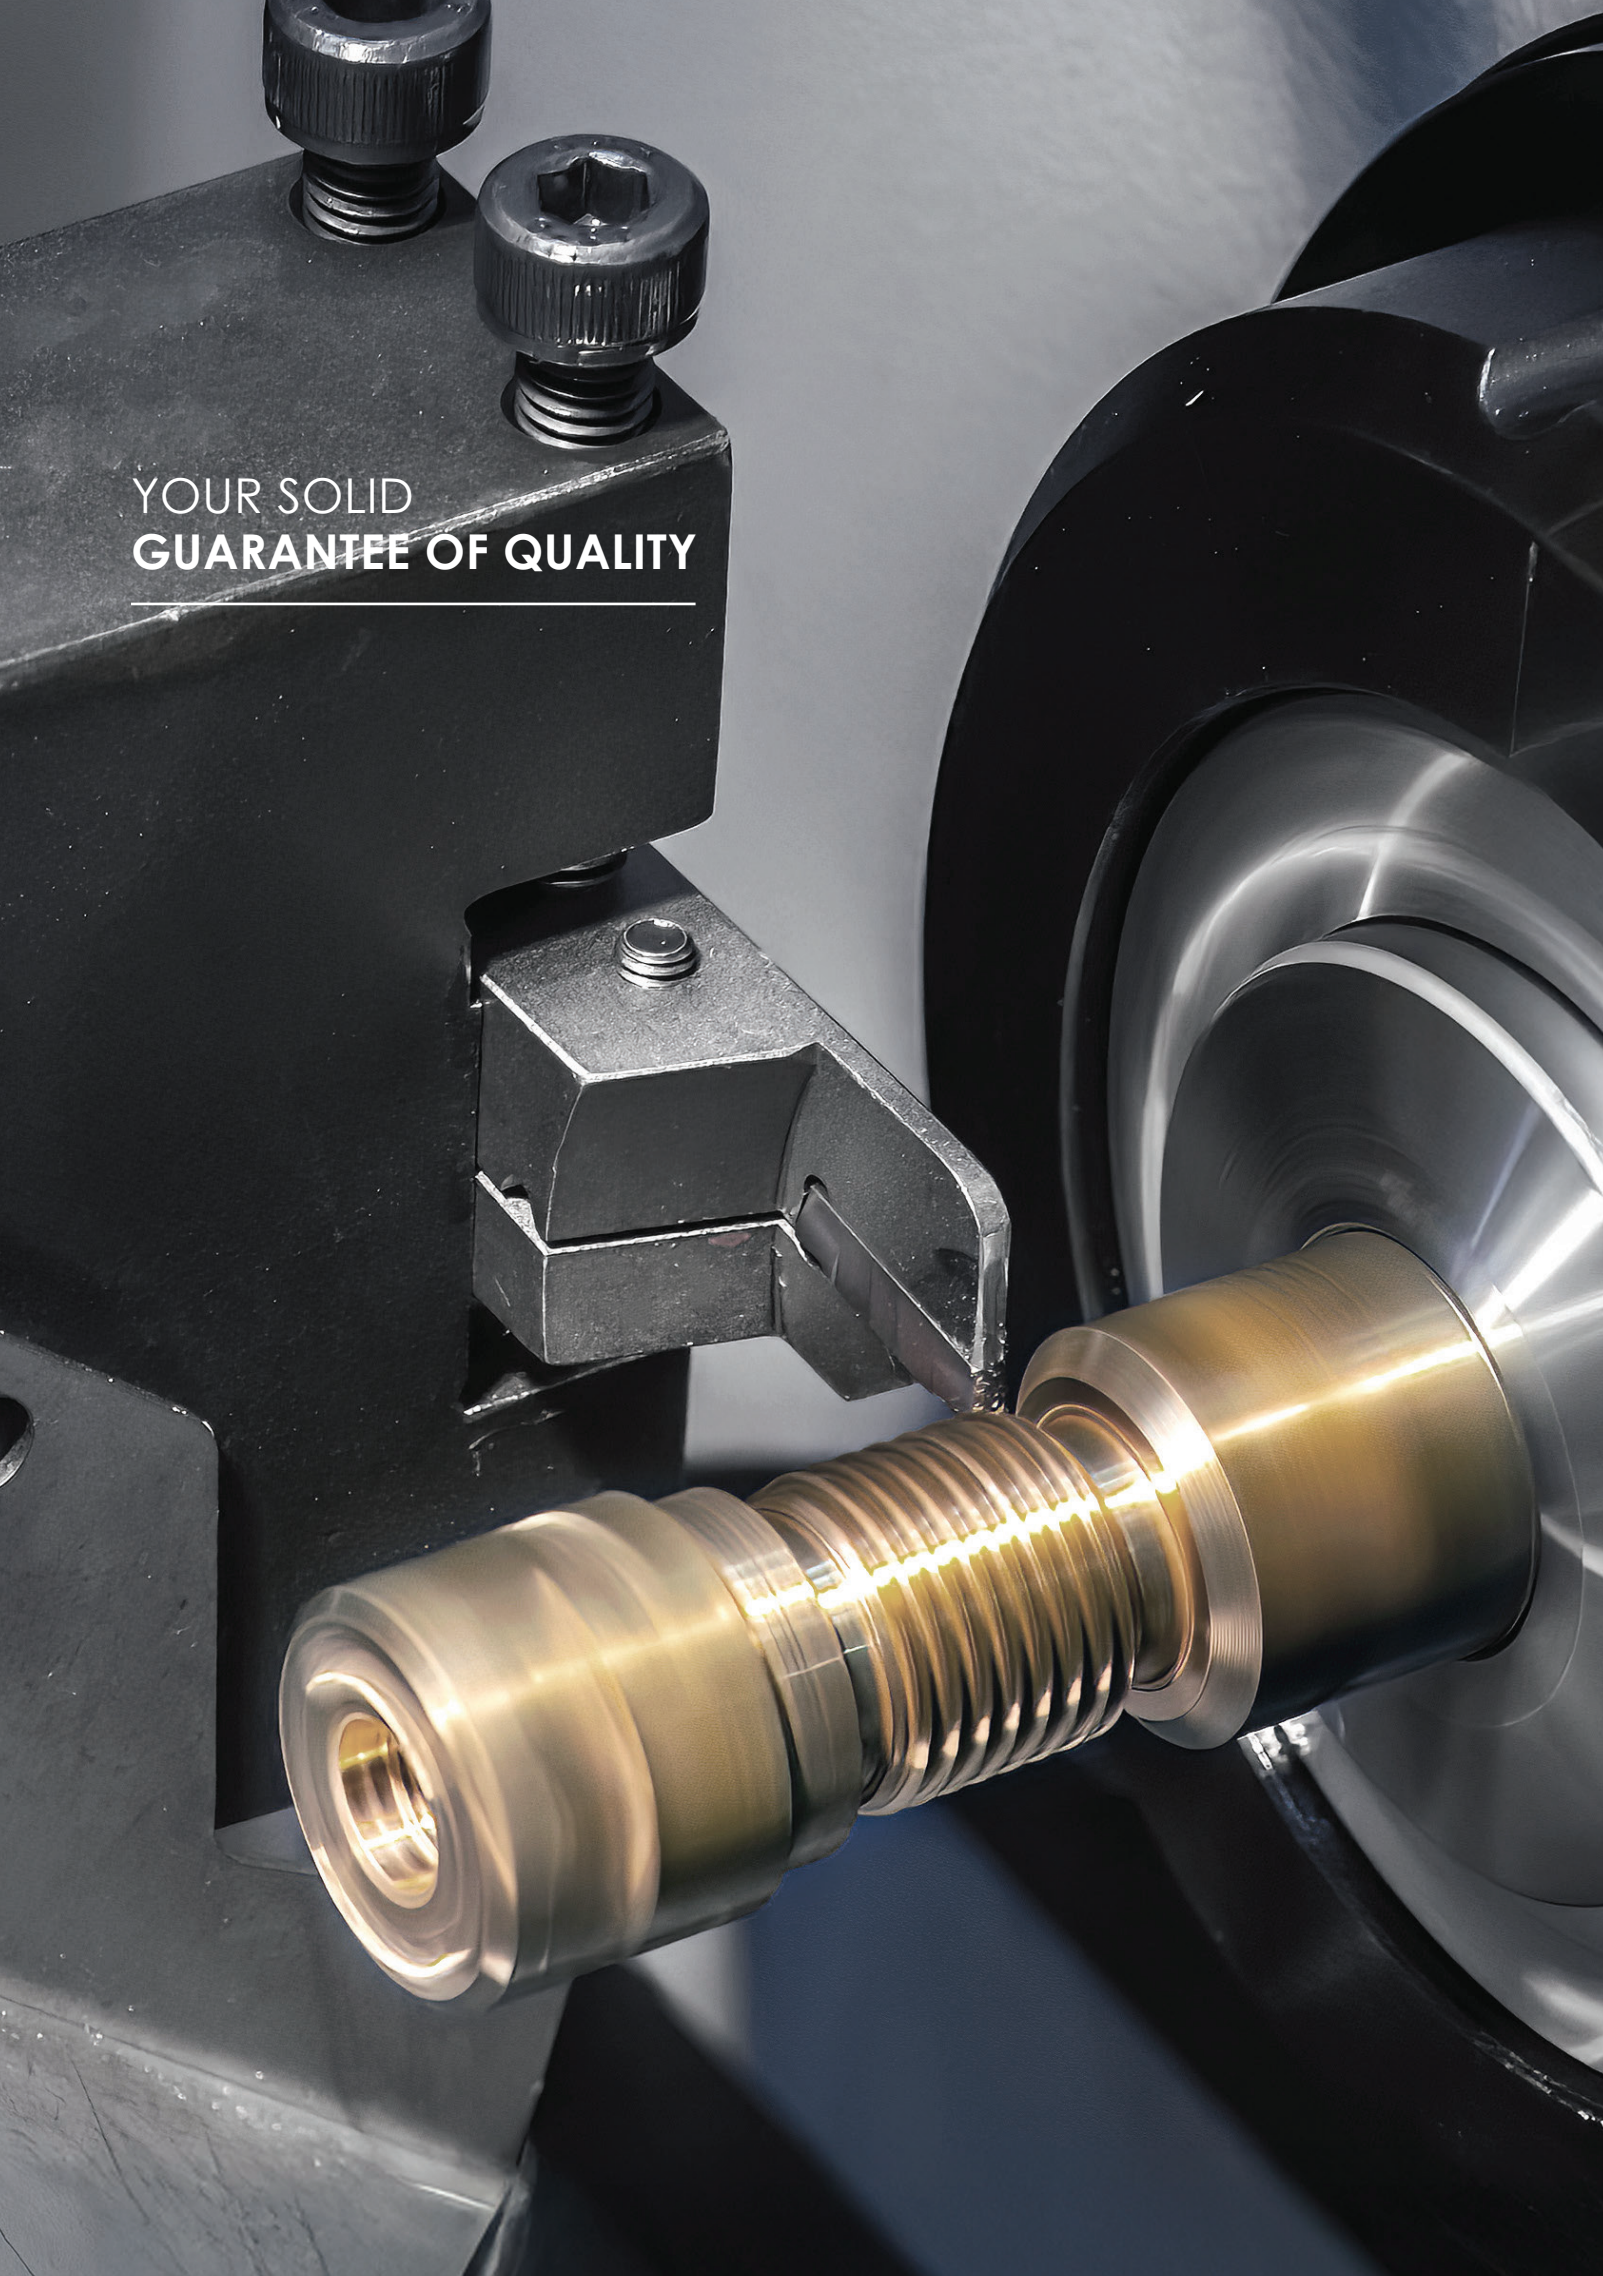

YOUR SOLID
GUARANTEE OF QUALITY

TABLE OF CONTENT

INTRODUCTION

ABOUT DOMUS ENGINEERING	03
OUR ADVANCED FACILITIES	05

BALL VALVES

BALL VALVES	09
COCK VALVES	11

ANGLE VALVES

3 POINTS ANGLE VALVE	15
5 POINTS ANGLE VALVE	16

FOOT VALVE

FOOT VALVE SS FILTER	18
FOOT VALVE BRASS FILTER	19

DOMUS VALVES

GATE VALVE	20
FLOAT VALVE	21
CHECK VALVE	23
STRAINER VALVE	24
PRESSURE REDUCING VALVE	26

CHROME EXTENSION

CHROME NIPPLE	29
CHROME CONNECTOR	29
CHROME REDUCER	30
CHROME EXTENSION	30



PIONEERING EXCELLENCE IN GLOBAL PLUMBING SOLUTIONS

Headquartered in North London, Domus Engineering Ltd is a leader in the plumbing industry, setting new benchmarks in quality and innovation.

With decades of expertise, we specialize in state-of-the-art valves, fittings, and distribution manifolds, delivering unmatched performance to both domestic and international markets.

Our products, recognized for their precision, durability, and efficiency, are trusted worldwide, including key markets in Saudi Arabia, the UAE, and Europe.

Built to exceed British, European, and WRAS standards, Domus continues to redefine industry expectations with every solution we deliver.

Since our inception in the 1980s, we have remained at the forefront of plumbing innovation, continuously evolving to meet the needs of modern infrastructure.

Our success is powered by strategic partnerships, advanced engineering, and an unwavering commitment to excellence.

OUR COMMITMENT TO **SUSTAINABILITY**



At Domus, sustainability is not just a goal—it's an integral part of our mission. We design innovative, water-saving solutions that deliver high performance while adhering to eco-friendly practices. By prioritizing environmental stewardship, our products are engineered to reduce water waste, enhance energy efficiency, and support sustainable infrastructure. Every Domus solution is a step towards a greener, more sustainable future.

[DOMUS-ENGLAND.CO.UK](https://www.domus-England.co.uk)



ADVANCED FACILITIES– BUILT FOR PERFORMANCE

AT DOMUS, INNOVATION DRIVES EVERYTHING WE DO.

Our cutting-edge manufacturing facilities are designed for efficiency, precision, and scalability, ensuring we meet the highest industry standards. With advanced automation and state-of-the-art tooling, we optimize every stage of production to deliver high-performance plumbing solutions that exceed expectations.

Our facilities operate with rigorous quality control, lean production methodologies, and continuous process refinement, minimizing waste while maximizing output. This commitment to excellence allows us to produce market-leading solutions with unmatched durability, reliability, and performance—powering residential, commercial, and industrial projects worldwide.

By integrating innovation with craftsmanship, Domus stands at the forefront of modern plumbing technology, shaping the future of the industry with every product we create.

DOMUS KEY MANUFACTURING STATS

18
Tooling Machines

60+
Workforce Employed



3
Assembly Lines

2M+
Units produced per year

DOMUS-ENGLAND.CO.UK



BALL VALVE RED HANDLE A100

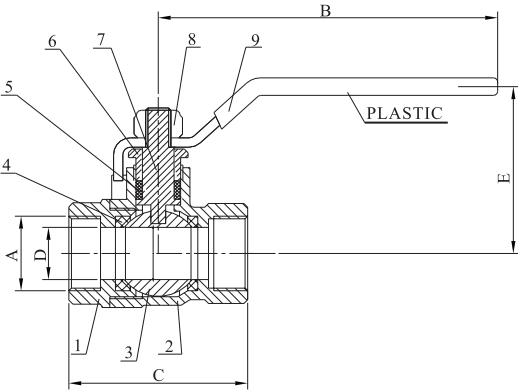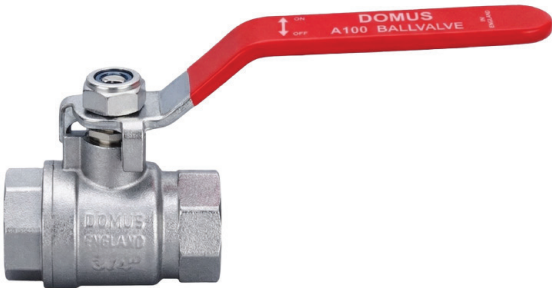

Description

Ball valve, full flow - Body nickel plated brass - Lever handle
Suitable for commercial and industrial buildings

Dimensions

Code	Size/A	B (mm)	C (mm)	D (mm)	E (mm)
A100/3	1/2"	91	54	14	46
A100/4	3/4"	106	62	19	56
A100/5	1"	128	74	23	60
A100/6	1 1/4"	136	83	31	63
A100/7	1 1/2"	145	94	39	76
A100/8	2"	159	107	45	84
A100/9	2 1/2"	237	138	63	127
A100/10	3"	237	155	74	133
A100/11	4"	237	177	90	147

Material Specifications

Component	Material
1. Body	Brass
2. Cover	Brass
3. Ball	Brass
4. Seal	PTFE
5. Sleeve	PTFE
6. Pressure nut	Brass
7. Nut	Gal. Brass
8. Stem	Brass
9. Handle	Steel

Size	Pressure
1/2"	40bar - 580psi
3/4" - 1"	30bar - 435psi
1 1/4" - 1 1/2"	25bar - 362psi
2" - 2 1/2"	18bar - 261psi
3" - 4"	12bar - 174psi

HEATING


COOLING

STEAM

COMP. AIR

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

BALL VALVE BLACK HANDLE **A400**

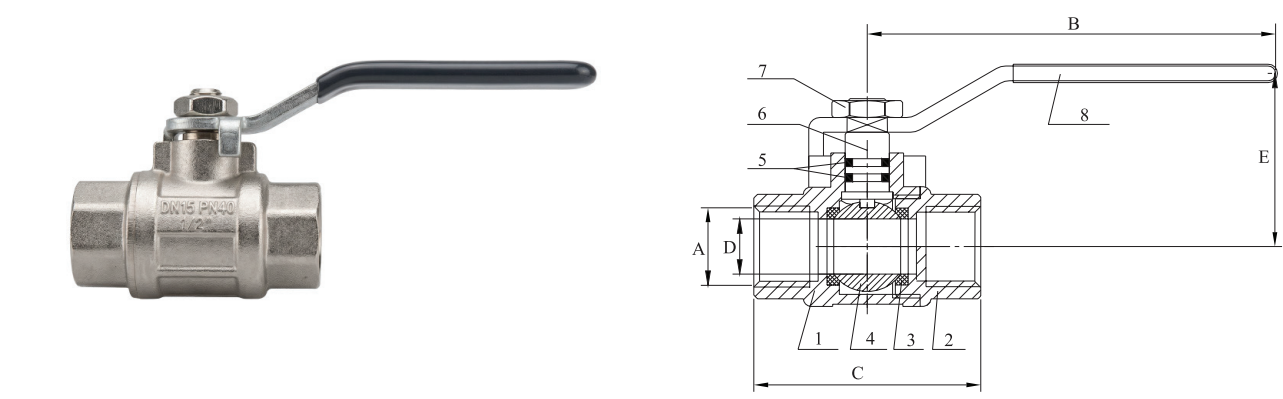

Description

Ball valve, full flow - Body nickel plated brass - Lever handle
Suitable for commercial and industrial buildings

Dimensions

Code	Size/ A	B (mm)	C (mm)	D (mm)	E (mm)
A400/3	1/2"	111	61.5	15	44
A400/4	3/4"	111	69	20	48
A400/5	1"	145	83	25	55
A400/6	1 1/4"	145	98	32	59
A400/7	1 1/2"	170	108	40	66
A400/8	2"	170	128.5	50	73

Material Specifications

Component	Material
1. Body	Brass
2. Cover	Brass
3. Seal	PTFE
4. Ball	Brass
5. O-ring	NBR
6. Stem	Brass
7. Nut	Gal. Brass
8. Handle	Brass

Size	Pressure
1/2"	50bar - 725psi
3/4" - 1"	40bar - 580psi
1 1/4" - 1 1/2"	30bar - 435psi
2"	25bar - 362.5psi

HEATING


COOLING

STEAM

COMP. AIR

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

YELLOW BALL VALVE **DO-BV**

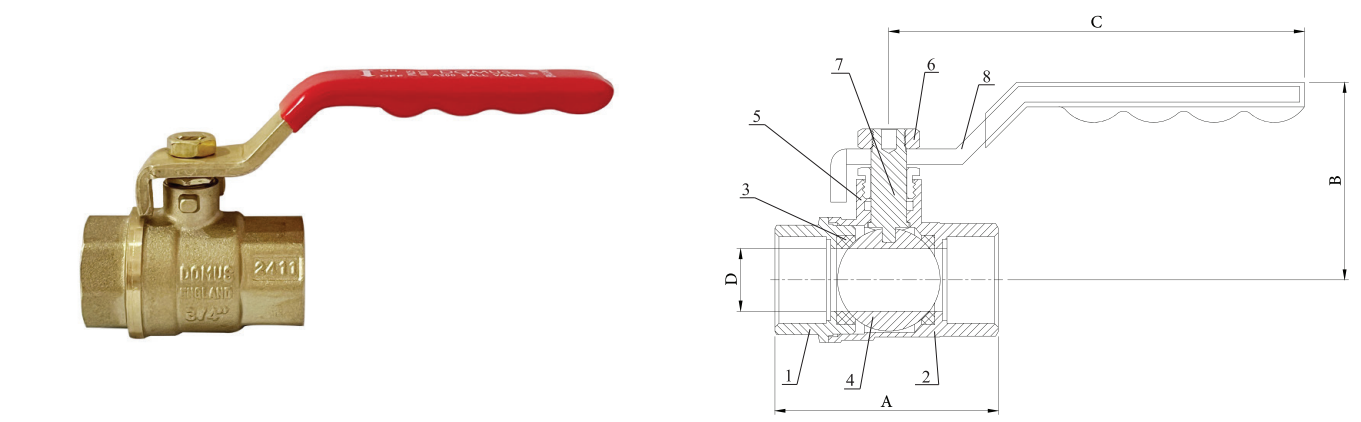

Description

Ball valve, full flow - Body nickel plated brass - Red Lever handle
Suitable for commercial and industrial buildings

Dimensions

Code	Size	A (mm)	B (mm)	C (mm)	D (mm)
DO-BV-101	1/2"	56	48	103	14
DO-BV-102	3/4"	60	55	103	18
DO-BV-103	1"	71	62	126	23
DO-BV-104	1 1/4"	78	72	160	30
DO-BV-105	1 1/2"	94	83	168	35
DO-BV-106	2"	105	88	188	42
DO-BV-107	3"	148	125	260	64
DO-BV-108	4"	173	137	275	78

Material Specifications

Component	Material
1. Body	Brass
2. Cover	Brass
3. Seal	PTFE
4. Ball	Brass
5. Sleeve	PTFE
6. Stem	Brass
7. Nut	Gal. Brass
8. Handle	Brass

HEATING

COOLING

STEAM


COMP. AIR

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

DOMUS
BRASS COCK VALVES



BIB COCK VALVE **A310**

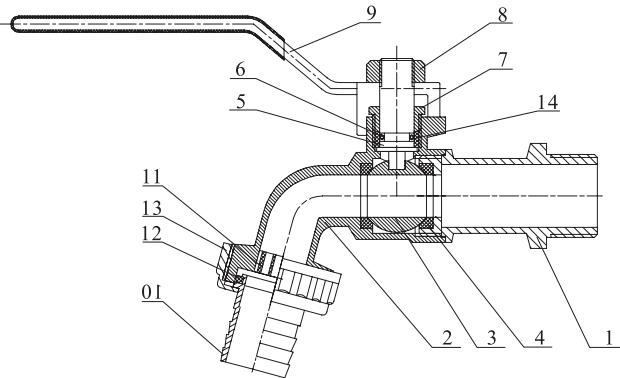

Description

Ball hose, bib cock with hose connection
Body nickel plated brass - Steel lever handle
Suitable for commercial and industrial buildings

Dimensions

Code	Size	Pressure
A310/3	1/2"	10bar - 145psi
A310/4	3/4"	10bar - 145psi
A310/5	1"	10bar - 145psi

Material Specifications

Component	Material
1. Connector	Brass
2. Body	Brass
3. Ball	Brass
4. Seal	PTFE
5. Stem	Brass
6. O-ring	NBR
7. Pressure cap	Brass
8. Nut	Steel
9. Handle	Steel
10. Outlet	Brass
11. Manifold	Plastic
12. Washer	NBR
13. Lock cap	Brass



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

DOMUS
BRASS ANGLE VALVES



BRASS ANGLE VALVE D106


Description

Brass angle valve 3 point handle - Chrome plated
Long body format - Includes rosette
Suitable for commercial buildings

Dimensions

Code	Size	A (mm)	B (mm)	C (")
D106/3	1/2"	98	54	1/2

Available Colors

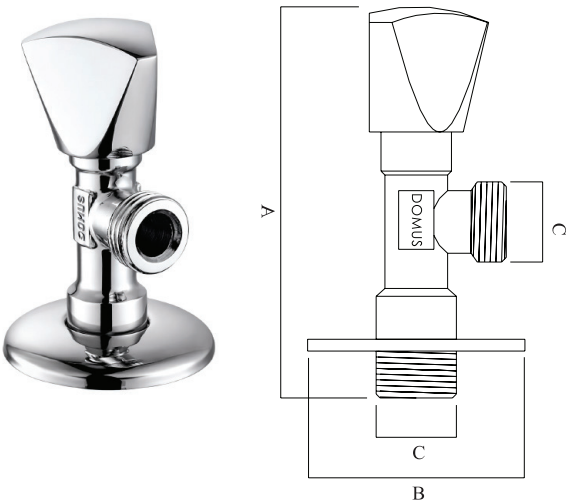

BRASS ANGLE VALVE D103


Description

Brass angle valve 3 point handle - Chrome plated
Available in long & short body format - Includes rosette
Suitable for commercial buildings

Dimensions

Code	Size	A (mm)	B (mm)	C (")
D103/3	1/2"	95	54	1/2
D103S/3	1/2"	82	54	3/8

Available Colors



WATER HEATING

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

BRASS ANGLE VALVE D105


Description

Brass angle valve 5 point handle - Chrome plated
Short body format - Includes rosette
Suitable for commercial buildings

Dimensions

Code	Size	A (mm)	B (mm)	C (")
D105/3	1/2"	95	54	1/2
D105S/3	1/2"	82	54	1/2

Available Colors

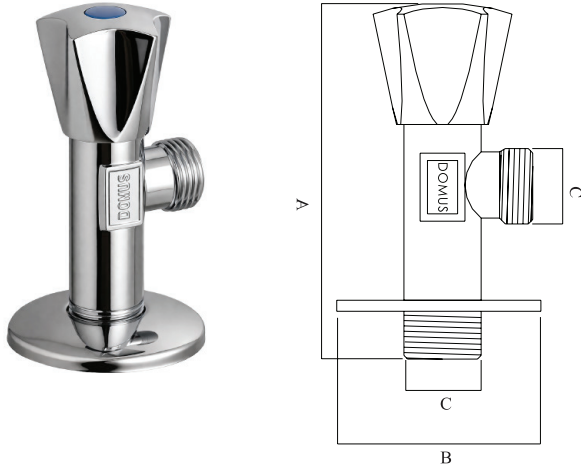

BRASS ANGLE VALVE D109


Description

Brass angle valve - Includes rosette
Available in Chrome, Copper and Bronze finish
Suitable for commercial buildings

Dimensions

Code	Size	A (mm)	B (mm)	C (")
D109/3	1/2"	99	54	1/2

Available Colors




WATER HEATING

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

DOMUS
BRASS FOOT VALVE



FOOT VALVE SS FILTER **D611**

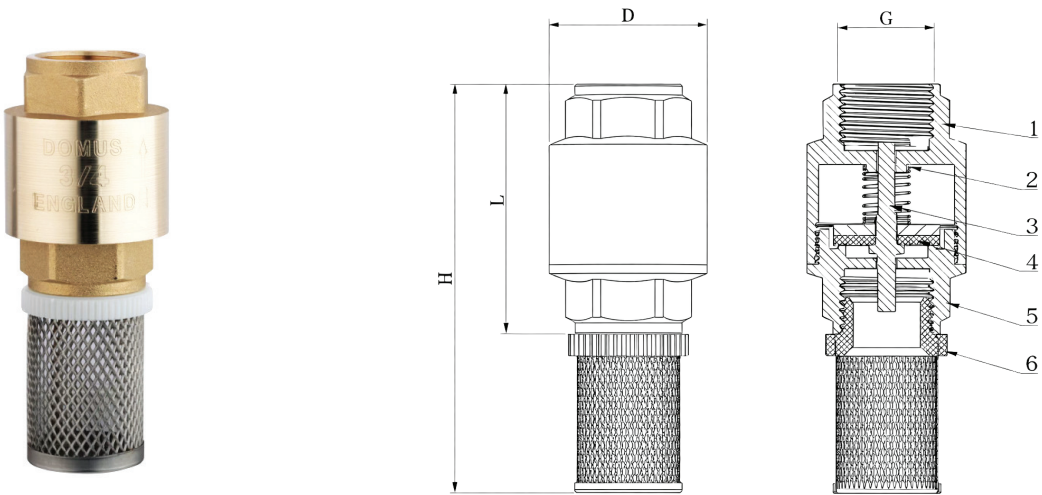

Description

Brass foot valve with stainless steel filter
Suitable for commercial and industrial applications
Pressure 1" to 2" (10bar-145psi), 2 1/2" to 4" (8bar-116psi) Filter 1200µm

Dimensions

Code	Size	D (mm)	H (mm)	L (mm)
D611/3	1/2"	32	55	94
D611/4	3/4"	42	61	106
D611/5	1"	48	68	125
D611/6	1 1/4"	58	81	141
D611/7	1 1/2"	67	82	148
D611/8	2"	80	92	175
D611/9	2 1/2"	95	110	210
D611/10	3"	111	115	220
D611/11	4"	138	126	238


Material Specifications

Component	Material
1. Body	Brass
2. Spring	Stainless Steel
3. Core	Brass
4. Seal Ring	NBR
5. Cap	ABS
6. Filter	Stainless Steel

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228



FOOT VALVE BRASS FILTER **D700**

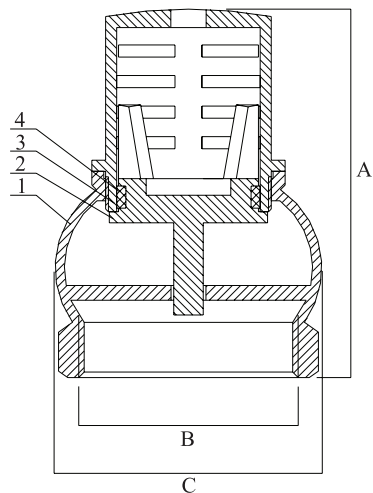

Description

Foot valve with brass filter
Suitable for commercial and industrial applications


Dimensions

Code	Size	A (mm)	B (")	C (mm)
D700/4	3/4"	68	3/4	40
D700/5	1"	73	1	48.5
D700/6	1 1/4"	80	1 1/4	58.5
D700/7	1 1/2"	88	1 1/2	62
D700/8	2"	100	2	72.5


Material Specifications

Component	Material
1. Body	Brass
2. Valve flap	Brass
3. Bonnet	Brass
4. Seal ring	NBR

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228



BRASS GATE VALVE **D640**

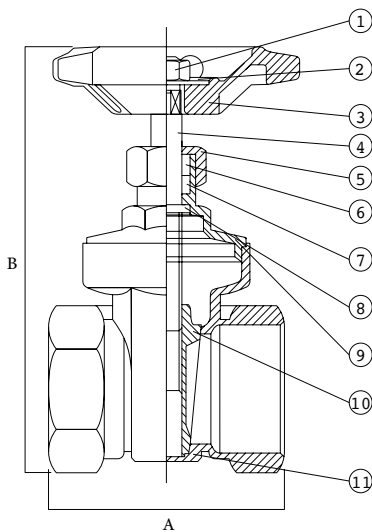

Description


Brass gate valve - Aluminium hand wheel
Suitable for commercial & industrial applications

Dimensions

Code	Size	A (mm)	B (mm)
D640/3	1/2"	45	70.8
D640/4	3/4"	53	76
D640/5	1"	60	92.5
D640/6	1 1/4"	64	110
D640/7	1 1/2"	68	123.5
D640/8	2"	81	140.5
D640/9	2 1/2"	95	250
D640/10	3"	110	270
D640/11	4"	125	320



Material Specifications

Component	Material
1. Handwheel nut	Brass bar
2. Reating disc	Aluminium
3. Handwheel	Aluminium
4. Stem	Brass bar
5. Gland nut	Brass bar
6. Gland packing	PTFE
7. Gland	Brass bar
8. Stem	Brass bar
9. Bonnet	Brass
10. Wedge	Brass
11. Body	Brass



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

BRASS FLOAT VALVE **D630**

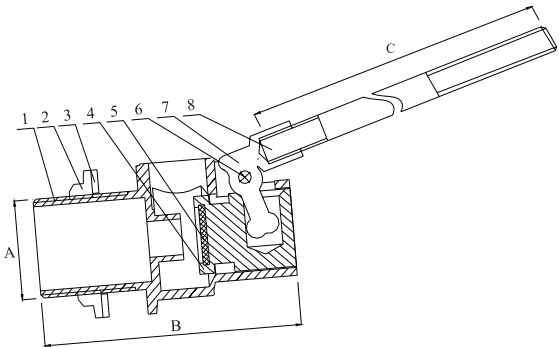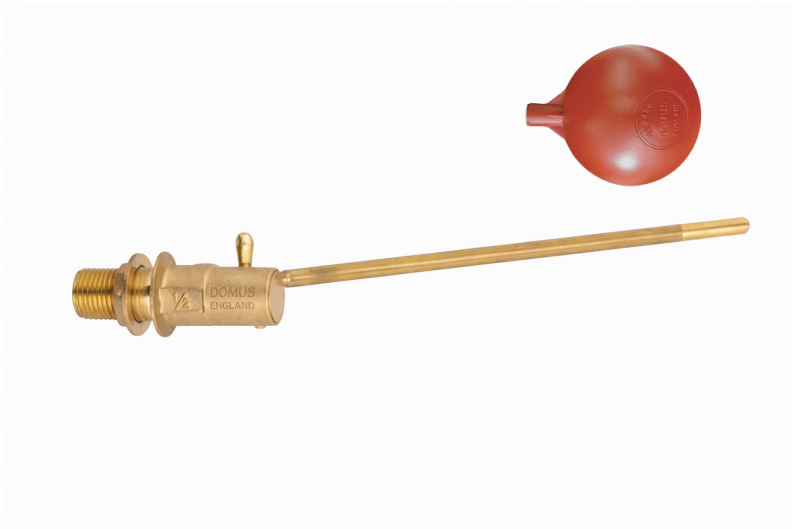

Description

Brass float valve with natural brass colour
Suitable for commercial and industrial applications

Dimensions

Code	Size	A (")	B (mm)	C (mm)
D630/2	1/2"	1/2	76	280
D630/3	3/4"	3/4	76	343
D630/4	1"	1	91.5	262
D630/5	1 1/4"	1 1/4	163	434.5
D630/6	1 1/2"	1 1/2	163	434.5
D630/7	2"	2	163	434.5


Material Specifications

Component	Material
1. Body	Brass
2. Hex nut	Brass
3. Rubber	NBR
4. Cartridge	Brass
5. Seal	NBR
6. Clip	Brass
7. Holter	Brass
8. Stem	Brass



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

BRASS FLOAT VALVE **D830**

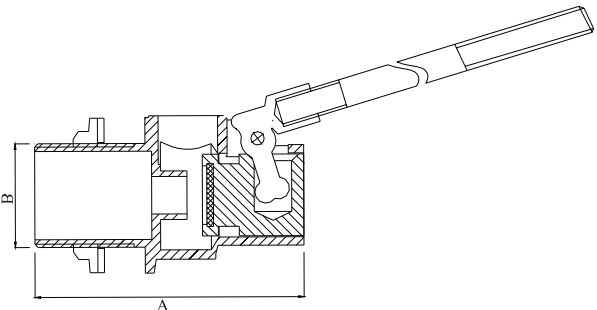

Description


Brass float valve with natural brass colour
Suitable for commercial and industrial applications

Dimensions

Code	Size	A (mm)	B (mm)
D830/3	1/2"	73	7
D830/4	3/4"	74	7
D830/5	1"	90	13
D830/6	1 1/4"	121	18
D830/7	1 1/2"	121	18
D830/8	2"	121	18


Material Specifications

Component	Material
1. Body	Brass
2. Hex nut	Brass
3. Cartridge	Brass
4. Stem	Brass



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

BRASS CHECK VALVE **D610**

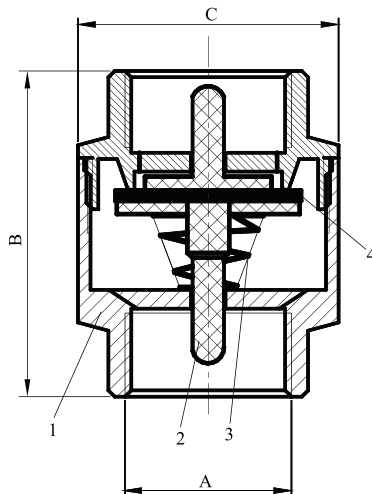

Description

Check valve with washer holder in brass
Suitable for commercial and industrial applications


Dimensions

Code	Size	A (")	B (mm)	C (mm)
D610/3	1/2"	1/2	46	33
D610/4	3/4"	3/4	51	38
D610/5	1"	1	53	44
D610/6	1 1/4"	1 1/4	61	59
D610/7	1 1/2"	1 1/2	70	67
D610/8	2"	2	78	80


Pressure

Code	Pressure
D610/3	12bar - 174psi
D610/4	12bar - 174psi
D610/5	12bar - 174psi
D610/6	10bar - 145psi
D610/7	10bar - 145psi
D610/8	8bar - 116psi

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228



BRASS STRAINER VALVE **DO-YS**

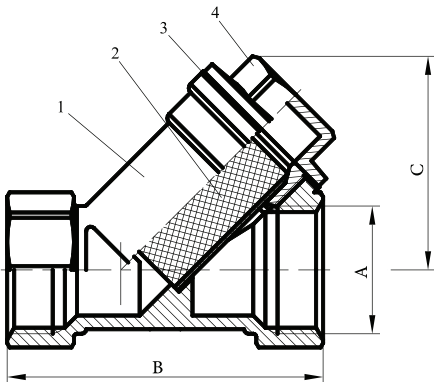

Description

Y Strainer - Brass body - Female/ female threads and inspection plug
Suitable for commercial, industrial and ship buildings


Dimensions

Code	Size	A (")	B (mm)	C (mm)
DO-YS-01	1/2"	1/2	52	37
DO-YS-02	3/4"	3/4	60	47
DO-YS-03	1"	1	77	54

Pressure - Filter

Code	Pressure	Filter
DO-YS-01	20bar - 290psi	800μ
DO-YS-02	20bar - 290psi	800μ
DO-YS-03	20bar - 290psi	800μ


Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228



DOMUS PRESSURE
REDUCING VALVE



PRESSURE REDUCING VALVE **DO-PV**

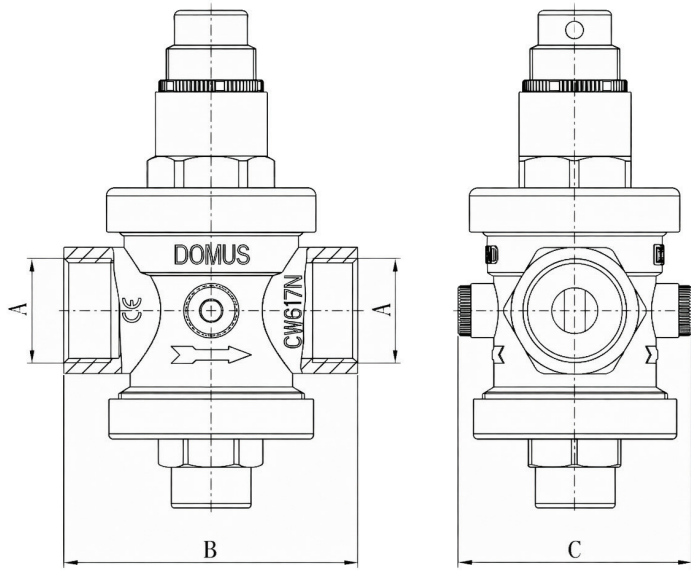


Nickel plated brass (CW617N) pressure reducing valve
Suitable for commercial and industrial applications
Pressuring Reduction >25 Bar to 1 - 6 Bar

Dimensions

Code	Size	A (")	B (mm)	C (mm)
DO-PV-15	1/2"	G1/2"	77	62
DO-PV-20	3/4"	G3/4"	91	70
DO-PV-25	1"	G1"	93	73
DO-PV-32	1 1/4"	G1 1/4"	115	81
DO-PV-40	1 1/2"	G1 1/2"	124.5	83
DO-PV-50	2"	G2"	142	103

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228





DOMUS
CHROME EXTENSION

CHROME NIPPLE C04



Description


Brass chrome plated connector with compression nut
Suitable for commercial buildings
Other sizes available upon request

Dimensions

Size	Item Weight (kg)	Inner Box	Outer Box	Full Pallet
1/2"x1/2"	0.04	100	200	14400



TAP CONNECTOR C05



Description

Brass chrome plated connector with compression nut
Suitable for commercial buildings
Other sizes available upon request


Dimensions

Size	Item Weight (kg)	Inner Box	Outer Box	Full Pallet
1/2"x1/2"x10mm	0.044	125	250	18000



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

CHROME REDUCER D865



Description


Brass chrome plated bushing male/ female
Suitable for commercial and idustrial buildings
Other sizes available upon request

Dimensions

Size	Item Weight (kg)	Inner Box	Outer Box	Full Pallet
1/2" x 3/8"	0.025	150	300	21600



CHROME EXTENSION D860



Description

Brass chrome plated extension with compression nut
Suitable for commercial buildings
Other sizes available upon request

Dimensions

Code	Size	Box Qty	Carton Qty	Pallet Qty
D860/10	1/2" x 10mm	40	400	19200
D860/15	1/2" x 15mm	36	280	17280
D860/20	1/2" x 20mm	28	260	13440
D860/25	1/2" x 25mm	24	240	11520



Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228

DOMUS
Cisterns




DOMUS

High Level Cistern with Pipe set



High Level Cistern with Pipe set 6000

Available for high- or low-level installation

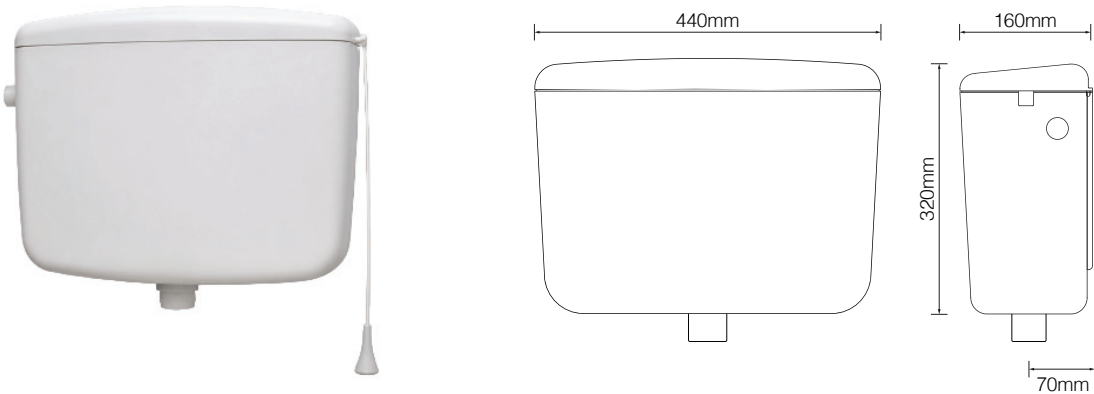

Description


Polypropylene cistern for Arabic-style floor toilets
Single flush system with 5.90 LPF water-saving discharge
Suitable for residential and commercial sanitary applications
Pressure rating: 0.5–8 bar

Tank Dimensions

Length (mm)	Width (mm)	Height (mm)	Total Weight (KG)
440	160	320	2.55


Fitting Dimensions	Size
Outer diameter of outlet	1.1/2" BSPP
Outer diameter of inlet	1/2" BSPP
Fixing Holes Inner Diameter	4 x 4mm
Distance from the middle of bottom inner hole	70mm

Thread to ISO228/ Equivalent to DIN EN ISO228 & BS EN ISO228



DOMUS

YOUR SOLID GUARANTEE OF QUALITY

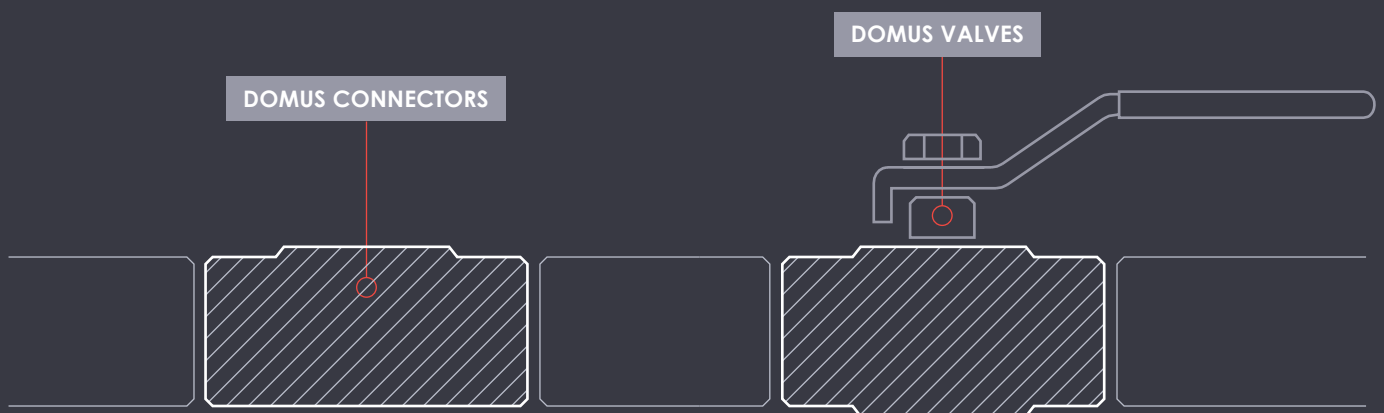

DOMUS ENGINEERING LTD

3 Lyttelton Road, London, UK, N2 0DR
Phone: +44 20 8953 3991
E-mail: exports@domus-england.co.uk

DOMUS-ENGLAND.CO.UK